Elimko

E-BK-100 E-BK-1000 E-BK-200 E-BK-2000 E-TBK-100 E-TBK-1000

BELT SCALES & WEIGHING BELT

CONVEYORS



DEFINITION

Elimko Belt scales are designed to measure the flow rate on each kind of belt conveyors. Elimko also produces weighing belt conveyors for better accuracy.

Elimko Belt scales are three types.

- 1. Single measuring idle E-BK-100X
- 2. Multi measuring idle or measuring platform E-BK-200X
- 3. Weighing belt conveyors. E-TBK-100X

Accuracy of the first type is 1% and accuracy of the second and third types are 0.5%. First and second types, accuracies are only valid for belts with hot or cold vulcanized smooth joint.

Elimko belt scales and weighing belt conveyors, E-BK-100 types use E-AC-10-BKB and E-BK-1000 types use E-AC-1000-BKB type controller for high accuracy.


E-AC-10-BKB and E-AC-1000-BKB controller measures weight and speed with 16 bit accuracies. Controller has standard RS485 Modbus Communication and it can have Profibus communication as an option.



E-BK-100



E-BK-2000

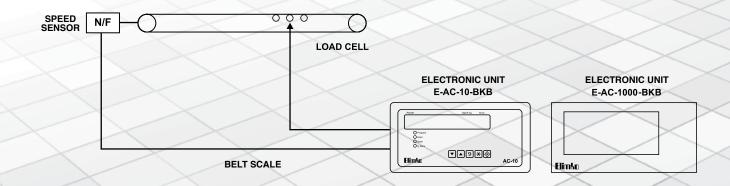

BELT SCALES

Belt Width (mm)	Straight Roller	2 Rollers V-Band	
400	•	•	•
500	•	•	•
650	•		•
800	•		•
1000	•		•
1200	•		•
1400	•		•

	Supply	240 V-50 Hz AC
	Temperature	-25 °C÷60 °C
	Protection Class	IP 65
	Belt Speed	0.1-5 m/sn
1	Flow Rate	1-5000 t/h
	Belt Inclination	≤ 15
1	Belt Joint	Hot or cold smooth joint
1	Minimum Belt Length	2000 mm

■ WEIGHING BELT CONVEYOR

	Belt Width	500-2000 mm
	Conveyor Length	2000-10000 mm
	Flow Rate	1-1000 t/h

Supply	400 V-50 Hz 3 faz
Temperature	-25 °C÷60 °C
Belt Speed	0.1–0.75 m/sn

STANDARD TYPES AND ORDERING INFORMATION

SINGLE IDLER BELT SCALE Accuracy 1%

TYPE	E-BK-100-XXXX-ZZZZ-NNNN	
	E-BK-1000-XXXX-ZZZZ-NNNN	
XXXX	Belt Width	mm
ZZZZ	Maximum Flow Rate	t/hr
NNNN	Belt Speed	mm/sc

MULTI IDLER OR MEASURING PLATFORM BELT SCALE Accuracy 0.5%

TYPE	E-BK-200-XXXX-ZZZZ-NNNN E-BK-2000-XXXX-ZZZZ-NNNN	
XXXX	Belt Width	mm
ZZZZ	Maximum Flow Rate	t/hr
NNNN	Belt Speed	mm/sc

WEIGHING BELT CONVEYOR Accuracy 0.5%

TYPE	E-TBK-100-XXXX-ZZZZ-NNNN-YYYY E-TBK-1000-XXXX-ZZZZ-NNNN-YYYY	
XXXX	Belt Width	mm
ZZZZ	Maximum Flow Rate	t/hr
NNNN	Belt Speed	mm/sc
YYYY	Conveyor Length	mm

The company's policy is one of continuous product improvement and the right is reserved to modify the information contained here in without notice.

* Please contact with Elimko for your special applications.





